


(43) Date of publication of application: 05.03.93

(72) Inventor: HASHIGUCHI KOTA  
HIRANO TATSURO

(57) Abstract:

**CONSTITUTION:** A second picture RAM 4 to store a cursor display signal is provided, and when an index program is selected from the teletext signal by a transmitter 7, a cursor is displayed. Then, when the up-key 9 or the down-key 8 of the cursor key of the transmitter 7 is operated, the cursor signal is moved in the form of being superimposed on a program number. When the cursor signal is moved to a desired program, and an execution command is given by an execution key, the program is outputted by the control of a display control part 5.

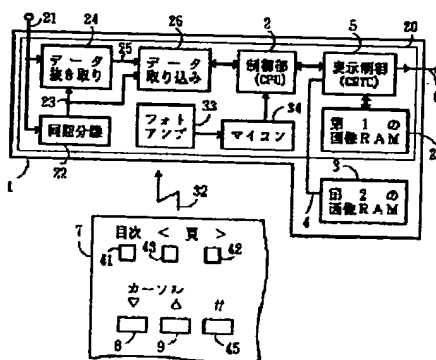

COPYRIGHT: (C)1993,JPO&Japio